



ConeJet® *VisiFlo® Hollow Cone Spray Tips*

Typical Applications:

Excellent: Post-Emerge Contact Herbicides, Fungicides and Insecticides —To assure finely atomized spray droplets reach target areas.


Good: For use with defoliants and foliar fertilizers at pressures 40 PSI (3 bar) and above.

Features:


- VisiFlo color-coded version consists of stainless steel or ceramic orifice in polypropylene body. Maximum operating pressure 300 PSI (20 bar). Spray angle is 80° at 100 PSI (7 bar).
- Finely atomized spray pattern provides thorough coverage.
- TX-VS1 and TX-VS2 available in VisiFlo color-coded stainless steel only.



Icon	bar	CAPACITY ONE NOZZLE IN l/min	I/ha 50cm									
			5 km/h	6 km/h	7 km/h	8 km/h	9 km/h	10 km/h	12 km/h	14 km/h	16 km/h	
TX-1	5.0	0.081	19.4	16.2	13.9	12.2	10.8	9.7	8.1	6.9	6.1	
	7.0	0.093	22.3	18.6	15.9	14.0	12.4	11.2	9.3	8.0	7.0	
	10.0	0.11	26.4	22.0	18.9	16.5	14.7	13.2	11.0	9.4	8.3	
	15.0	0.13	31.2	26.0	22.3	19.5	17.3	15.6	13.0	11.1	9.8	
TX-2	5.0	0.16	38.4	32.0	27.4	24.0	21.3	19.2	16.0	13.7	12.0	
	7.0	0.19	45.6	38.0	32.6	28.5	25.3	22.8	19.0	16.3	14.3	
	10.0	0.22	52.8	44.0	37.7	33.0	29.3	26.4	22.0	18.9	16.5	
	15.0	0.26	62.4	52.0	44.6	39.0	34.7	31.2	26.0	22.3	19.5	
TX-3	5.0	0.25	60.0	50.0	42.9	37.5	33.3	30.0	25.0	21.4	18.8	
	7.0	0.28	67.2	56.0	48.0	42.0	37.3	33.6	28.0	24.0	21.0	
	10.0	0.33	79.2	66.0	56.6	49.5	44.0	39.6	33.0	28.3	24.8	
	15.0	0.39	93.6	78.0	66.9	58.5	52.0	46.8	39.0	33.4	29.3	
TX-4	5.0	0.45	108	90.0	77.1	67.5	60.0	54.0	45.0	38.6	33.8	
	7.0	0.51	129.6	108.0	94.3	82.5	73.3	66.0	55.0	47.1	41.3	
	10.0	0.59	151.2	126.0	109.4	96.3	85.3	76.4	64.4	54.5	48.5	
	15.0	0.70	182.4	152.0	132.3	117.4	104.3	93.6	79.0	66.6	59.6	
TX-6	5.0	0.50	120	100	85.7	75.0	66.7	60.0	50.0	42.9	37.5	
	7.0	0.58	139	116	99.4	87.0	77.3	69.6	58.0	49.7	43.5	
	10.0	0.68	163	136	117	102	90.7	81.6	68.0	58.3	51.0	
	15.0	0.82	197	164	141	123	109	98.4	82.0	70.3	61.5	
TX-8	5.0	0.67	161	134	115	101	89.3	80.4	67.0	57.4	50.3	
	7.0	0.79	190	158	135	119	105	94.8	79.0	67.7	59.3	
	10.0	0.93	223	186	159	140	124	112	93.0	79.7	69.8	
	15.0	1.10	264	220	189	165	147	132	110	94.3	82.5	
TX-10	5.0	1.00	240	200	171	150	133	120	100	85.7	75.0	
	7.0	1.18	288	240	206	180	160	144	120	103	90.0	
	10.0	1.40	336	280	240	210	187	168	140	120	105	
	15.0	1.68	384	320	274	240	213	192	160	137	120	
TX-12	5.0	1.00	240	200	171	150	133	120	100	85.7	75.0	
	7.0	1.20	288	240	206	180	160	144	120	103	90.0	
	10.0	1.40	336	280	240	210	187	168	140	120	105	
	15.0	1.70	408	340	291	255	227	204	170	146	128	
TX-18	5.0	1.50	360	300	257	225	200	180	150	129	113	
	7.0	1.80	432	360	309	270	240	216	180	154	135	
	10.0	2.20	528	440	377	330	293	264	220	189	165	
	15.0	2.60	624	520	446	390	347	312	260	223	195	
TX-26	5.0	2.20	528	440	377	330	293	264	220	189	165	
	7.0	2.60	624	520	446	390	347	312	260	223	195	
	10.0	3.10	744	620	531	465	413	372	310	266	233	
	15.0	3.80	912	760	651	570	507	456	380	326	285	
TX-VS1	5.0	4.40	1056	880	754	660	587	528	440	377	330	
	20.0	4.40	1056	880	754	660	587	528	440	377	330	

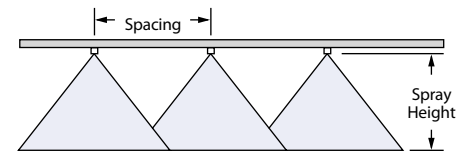

Optimum Spray Height

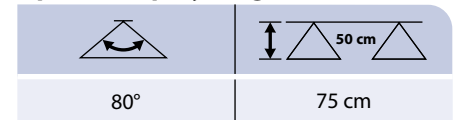

See pages 173–187 for useful formulas and information.

How to order:

Specify tip number.

Examples:

- TX-VS4 – Stainless Steel with VisiFlo color-coding
- TX-4 – Brass
- TX-SS4 – Stainless Steel
- TX-VK4 – Ceramic with VisiFlo color-coding

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).

†Specify material.