




DG TeeJet® Drift Guard Even Flat Spray Tips

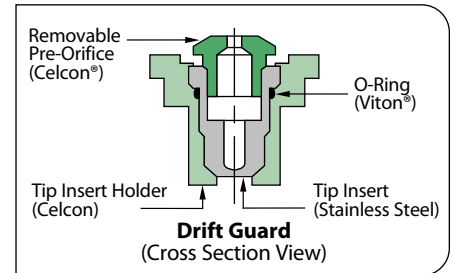


Note: Due to the pre-orifice design, this tip is not compatible with the 4193A check valve.

Typical Applications:

Can be used for pre-emerge surface-applied herbicides or post-emerge systemic herbicide applications.

Features:

- Pre-orifice design produces large droplets to reduce drift.
- Ideal for banding over the row or in row middles.
- Provides uniform distribution throughout the flat spray pattern.
- Easily mounted on spray boom or planter.
- Stainless steel with VisiFlo® color-coding.

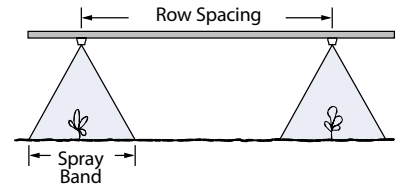

Icon	bar	DROPSIZE	CAPACITY ONE NOZZLE IN l/min	I/ha \triangle 50cm \triangle Field Hectares						I/ha \triangle 75cm \triangle Field Hectares					
				4 km/h	6 km/h	8 km/h	10 km/h	15 km/h	20 km/h	4 km/h	6 km/h	8 km/h	10 km/h	15 km/h	20 km/h
				DG95015EVS (100)	2.0 M	0.48	144	96.0	72.0	57.6	38.4	28.8	96.0	64.0	48.0
	2.5 M	0.54	162	108	81.0	64.8	43.2	32.4	108	72.0	54.0	43.2	28.8	21.6	
	3.0 F	0.59	177	118	88.5	70.8	47.2	35.4	118	78.7	59.0	47.2	31.5	23.6	
	4.0 F	0.68	204	136	102	81.6	54.4	40.8	136	90.7	68.0	54.4	36.3	27.2	
DG9502EVS (50)	2.0 M	0.65	195	130	97.5	78.0	52.0	39.0	130	86.7	65.0	52.0	34.7	26.0	
	2.5 M	0.72	216	144	108	86.4	57.6	43.2	144	96.0	72.0	57.6	38.4	28.8	
	3.0 M	0.79	237	158	119	94.8	63.2	47.4	158	105	79.0	63.2	42.1	31.6	
	4.0 M	0.91	273	182	137	109	72.8	54.6	182	121	91.0	72.8	48.5	36.4	
DG9503EVS (50)	2.0 C	0.96	288	192	144	115	76.8	57.6	192	128	96.0	76.8	51.2	38.4	
	2.5 M	1.08	324	216	162	130	86.4	64.8	216	144	108	86.4	57.6	43.2	
	3.0 M	1.18	354	236	177	142	94.4	70.8	236	157	118	94.4	62.9	47.2	
	4.0 M	1.36	408	272	204	163	109	81.6	272	181	136	109	72.5	54.4	
DG9504EVS (50)	2.0 C	1.29	387	258	194	155	103	77.4	258	172	129	103	68.8	51.6	
	2.5 C	1.44	432	288	216	173	115	86.4	288	192	144	115	76.8	57.6	
	3.0 M	1.58	474	316	237	190	126	94.8	316	211	158	126	84.3	63.2	
	4.0 M	1.82	546	364	273	218	146	109	364	243	182	146	97.1	72.8	
DG9505EVS (50)	2.0 C	1.61	483	322	242	193	129	96.6	322	215	161	129	85.9	64.4	
	2.5 C	1.80	540	360	270	216	144	108	360	240	180	144	96.0	72.0	
	3.0 C	1.97	591	394	296	236	158	118	394	263	197	158	105	78.8	
	4.0 M	2.27	681	454	341	272	182	136	454	303	227	182	121	90.8	

Note: Always double check your application rates. Tabulations are based on spraying water at 70°F (21°C).



Nozzle Size	Row Spacing	I/ha CONVERSION FACTORS*	
		50cm	75cm
20 cm	10 cm	2.50	3.75
25 cm	13 cm	2.00	3.00
30 cm	15 cm	1.67	2.50
40 cm	20 cm	1.25	1.88

*To find I/ha rate on band widths, multiply the tabulated I/ha for ROW SPACING by conversion factors.

See pages 173–187 for drop size classification, useful formulas and information.

How to order:

Specify tip number.

Example:

DG95015EVS – Stainless Steel with VisiFlo color-coding