



# DirectoValve® 450 Series Shutoff Manifold

450BEC manifolds are available with E or EC series motors with cable or DIN electrical connections. See page 71 for more information on DirectoValve motors.

## Features:

- 25 RPM, 0.6 second shutoff fully open to close.
- Available in 2-way version only. Pressure regulating valves can be incorporated.
- Flexible inlet/outlet connections allow for quick, simple plumbing for as many valves as needed for your sprayer.
- Stainless steel stem with optional polypropylene or stainless steel ball.
- Maximum pressure rating of 200 PSI (14 bar).
- The flow rate for the 450BEC 2-way valve is 32 GPM (121 l/min) with 5 PSI (0.34 bar) pressure drop.
- Wetted parts are Nylon, Teflon®, polypropylene and Viton®.




**451BEC-24-C Valve**  
(rear view)



(front view)



**453BEC-24-C Manifold**  
(rear view)

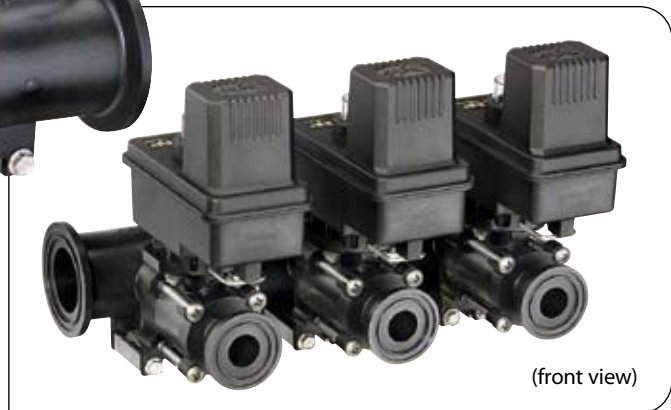

(front view)